
RX

Ingredients:

*Tip Splay with twin tip tail, no early tail splay = more running length contact. *Durable and fast 4001 sintered running base. *Ultra-high-molecular-weight polyethylene orbicular sidewalls....Extra resistant to abuse. *Strategically blended Basswood & Ash vertical laminate wood core; with "Book ended" precision. *Oversized 2.2mm edges with full wrap tip and tail; extra protection from impacts. *Rubberized epoxy; flexible and impact resistant with ultra high adhesion properties. *22 oz. triaxial fiberglass.

*Vibrant and durable fleece nylon top sheet. *VDS Rubber damping around the skis entire Perimeter. Reduces vibrations and improves bond strength. *Perforated VDS Rubber binding zone; reduces vibration and strengthens the binding mount zone.

*179 version displayed.

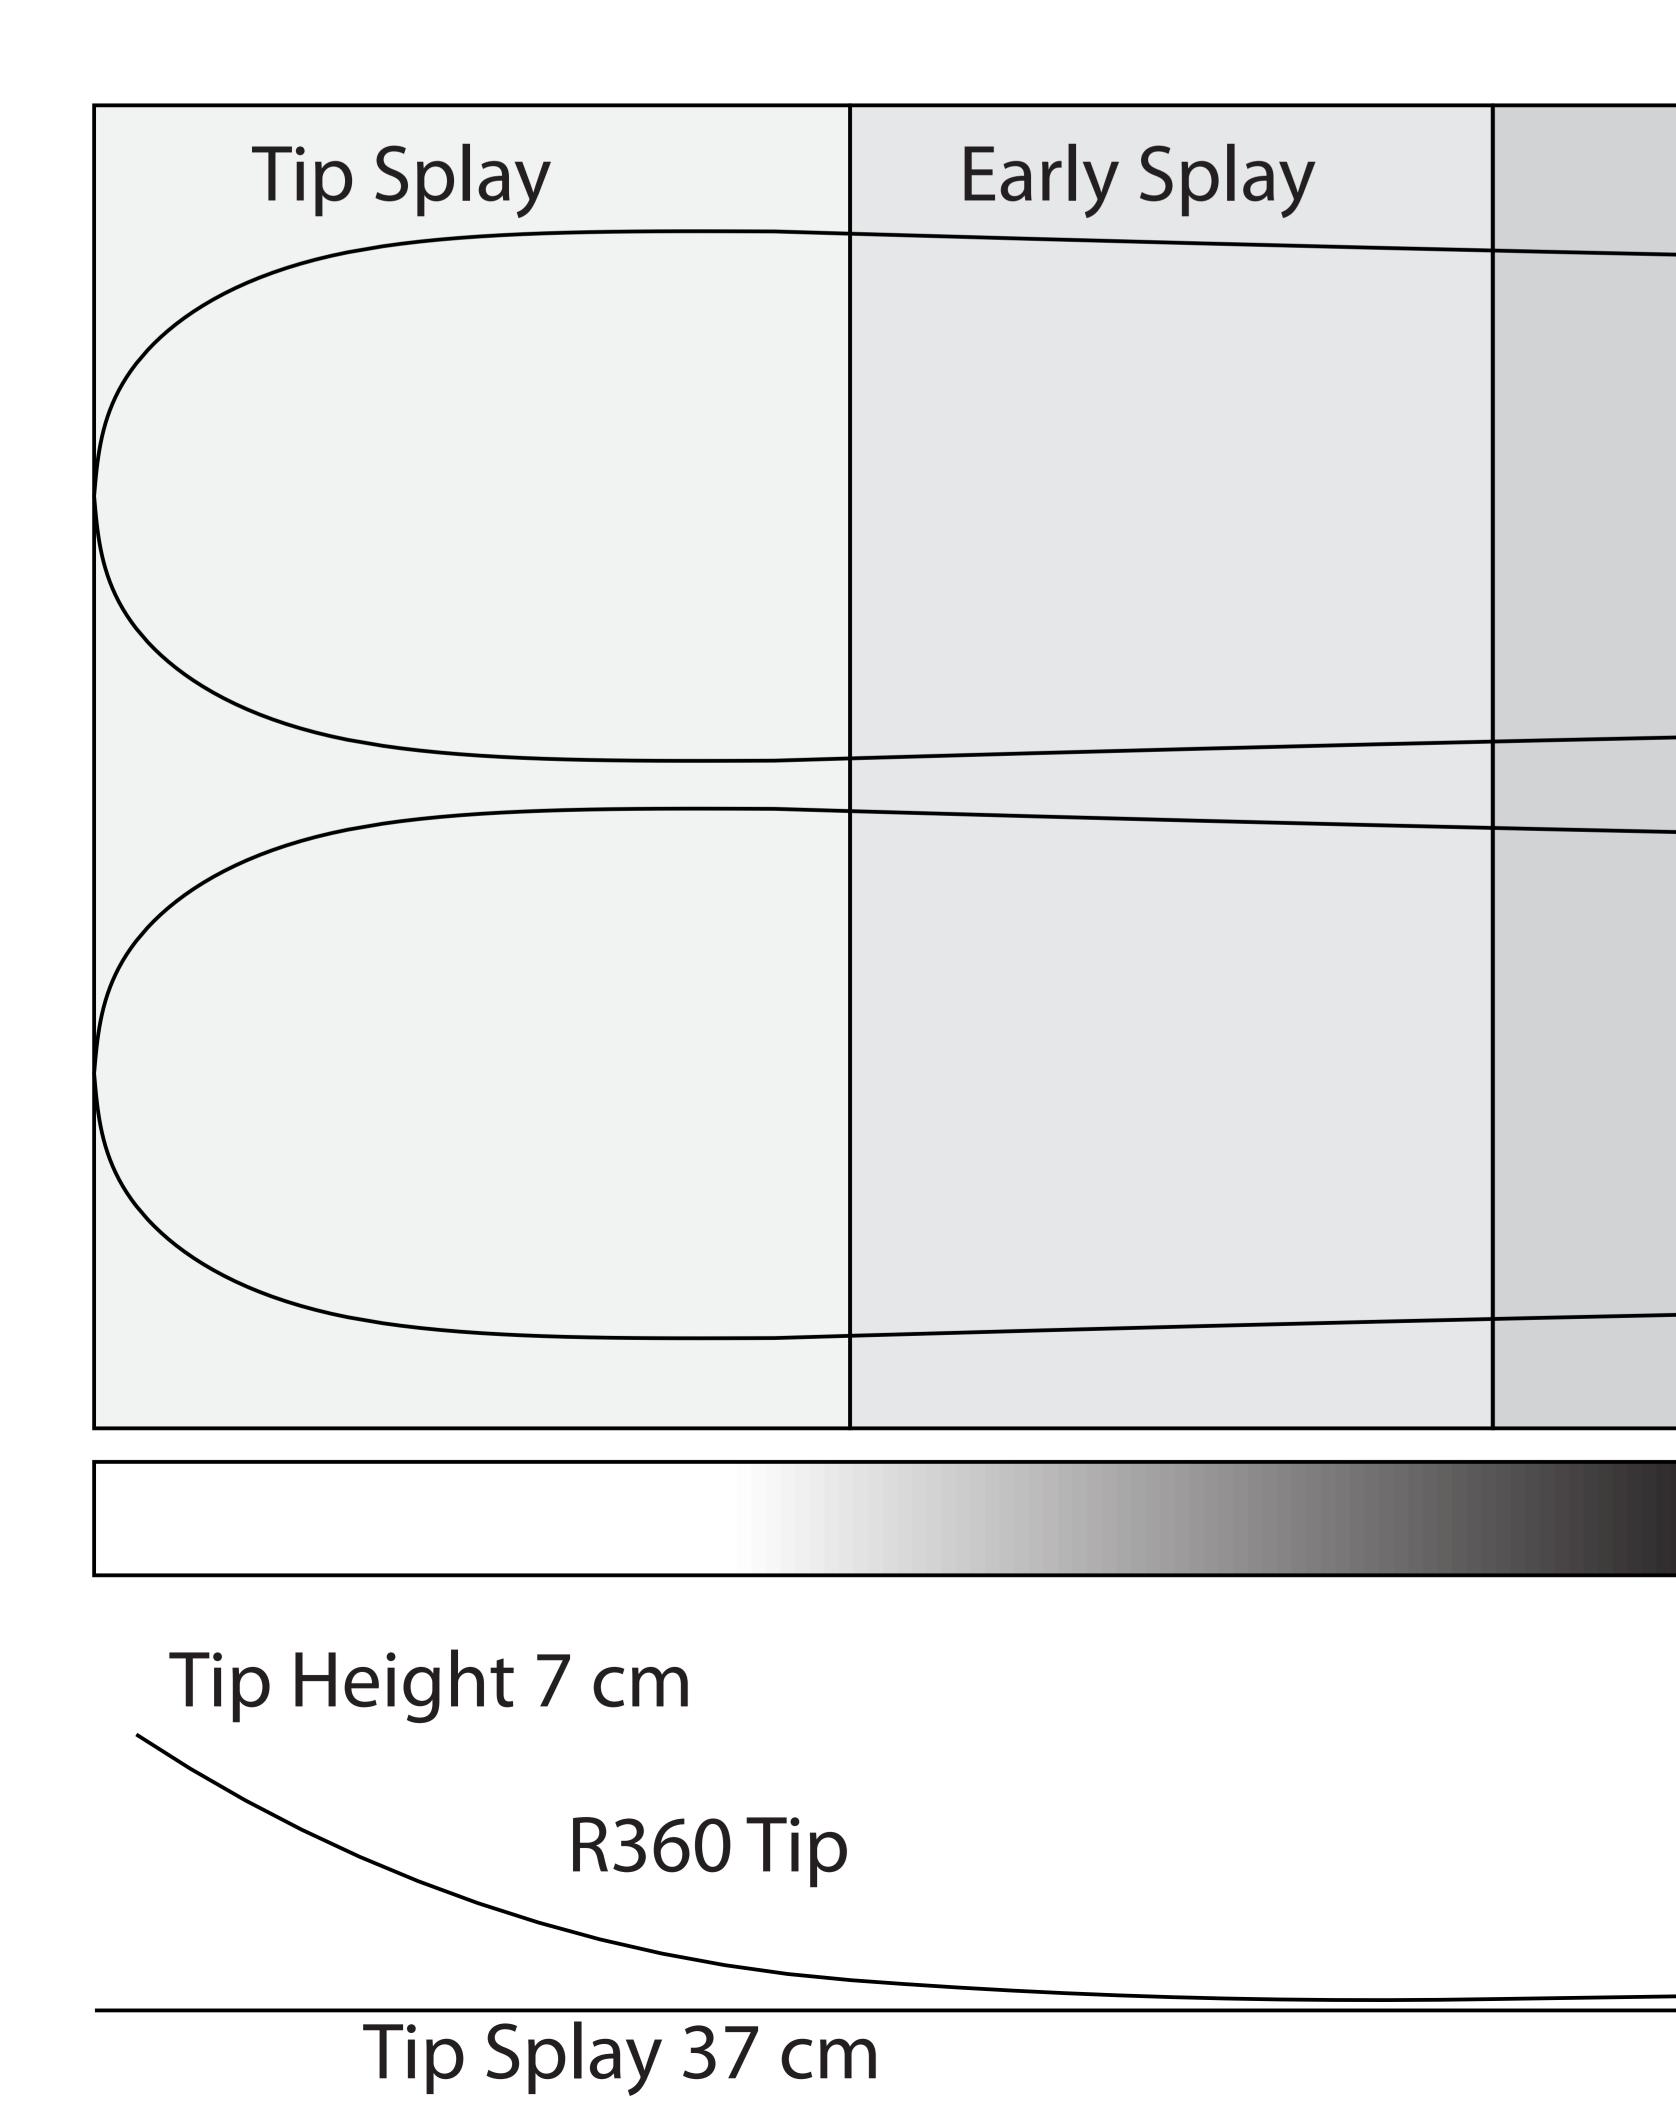


Camber Zone

IRX Tip (MM) Mid (MM) Tail (MM) Base Length (CM) **Boot Center negative** Camber Height (mm) Camber contact Lengt Tip Height (CM) Tail Height (CM) Total Tip Splay (CM) Total Tail Splay (CM) Tip Taper (CM) Tail Taper (CM) Turn Radius (M) Side Cut length (CM) Weight (lbs)

Flex Meter = 7

Camber 5mm x 123 cm

	169	179	189
	141	141	141
	116	116	116
	128	128	128
	169	179	189
e (CM)	8	9	9
	5	5	5
gth (CM)	113	123	133
	7	7	7
	5	5	5
	37	37	37
	19	19	19
	20	20	20
	16	16	16
	25	28	32
	133	143	153
	8	8.5	9

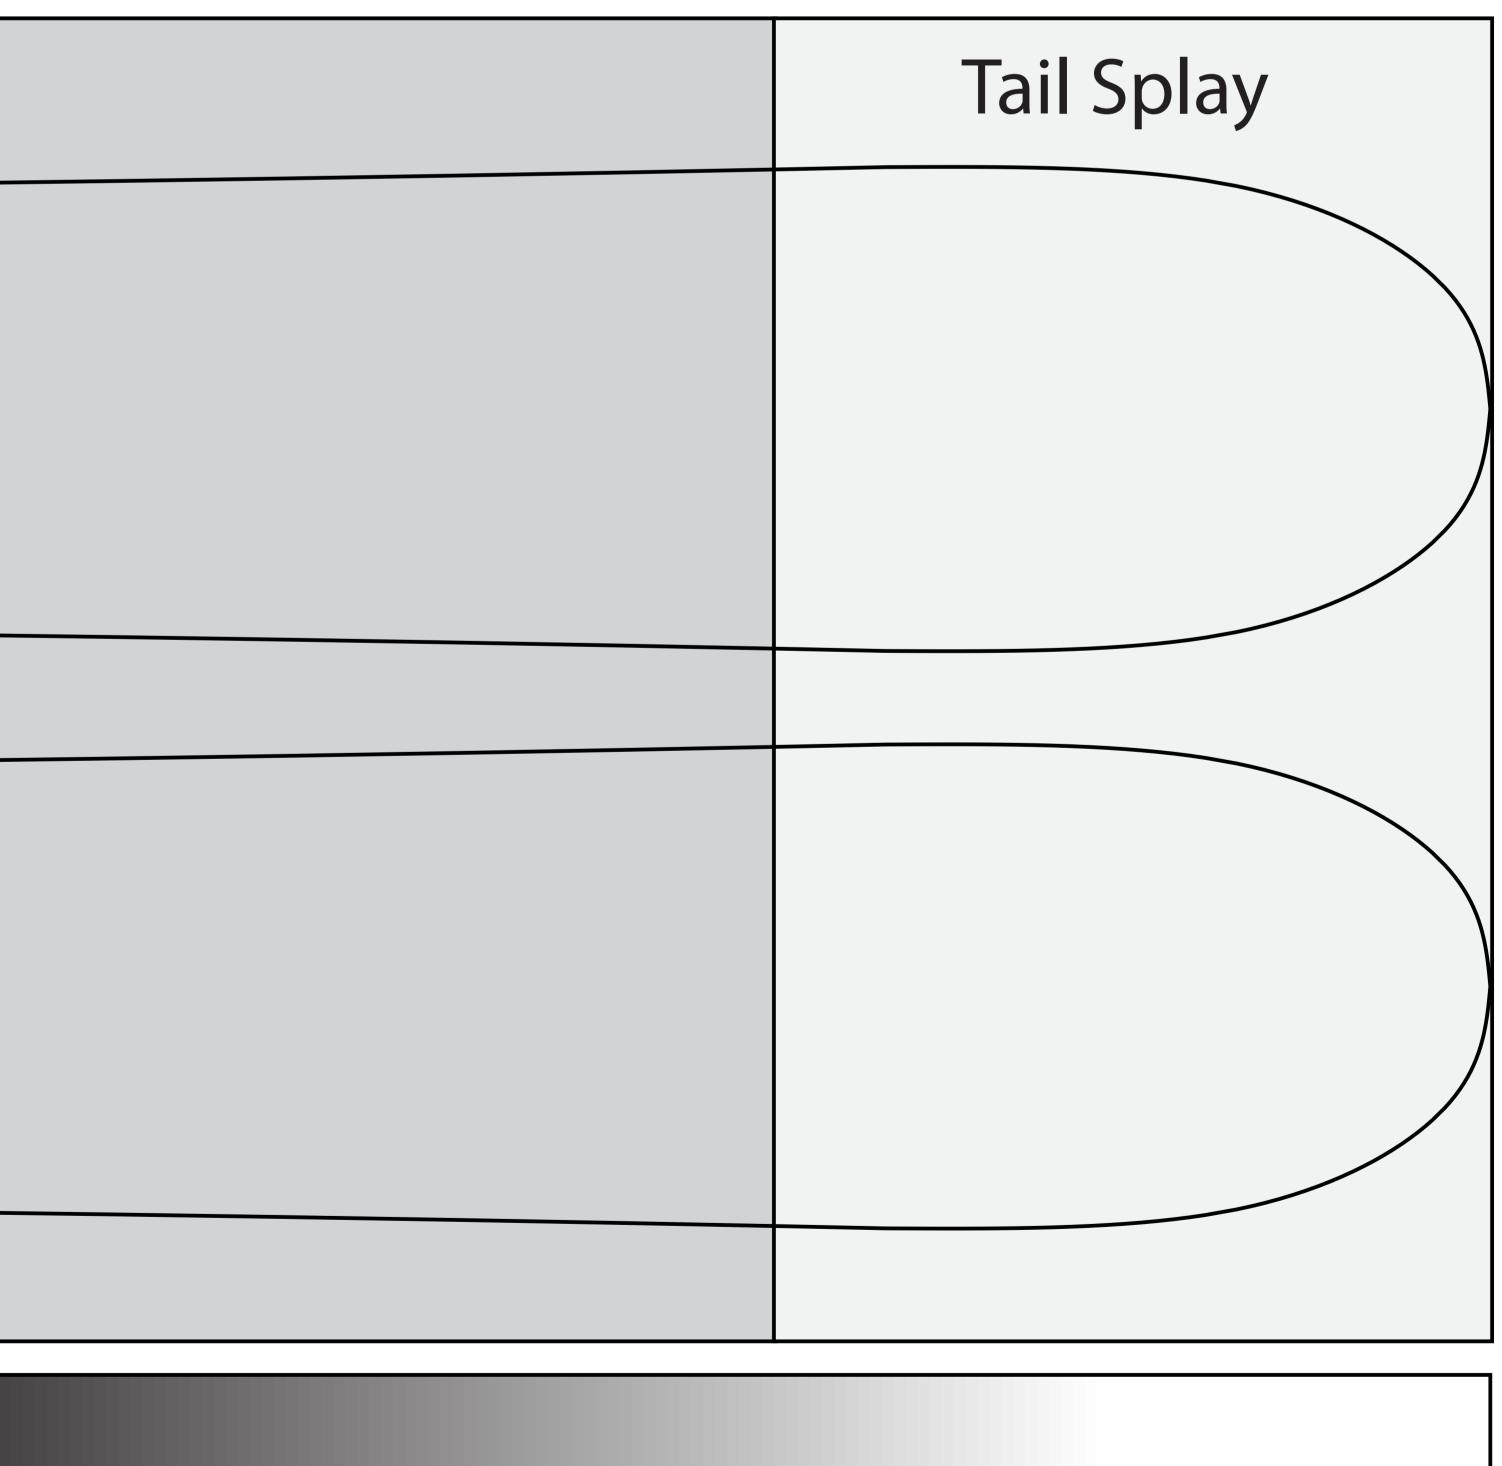

Tail Height 5 cm

R360 Tail

Tail Splay 19 cm