
# Backcountry

#### **Ingredients:**

\*Durable and fast 4001 sintered running base \*Ultra-high-molecular-weight polyethylene orbicular sidewalls....Extra resistant to abuse. \*Strategically blended Basswood & Ash vertical laminate wood core; with "Book ended" precision. \*Oversized 2.2mm edges with full wrap tip and tail; extra protection from impacts. \*Rubberized epoxy; flexible and impact resistant with ultra high adhesion properties. \*Lightweight 19 oz. triaxial fiberglass. \*Carbon fiber re-enforcements; correctly engineered for a lighter-stiffer-damper ride. \*8210 Ultra light translucent top sheet; durable and light weight. \*VDS Rubber damping around the skis entire Perimeter. Reduces vibrations and improves bond strength. \*Perforated VDS Rubber binding zone; reduces vibration and strengthens the binding mount zone.

\*180 version displayed.

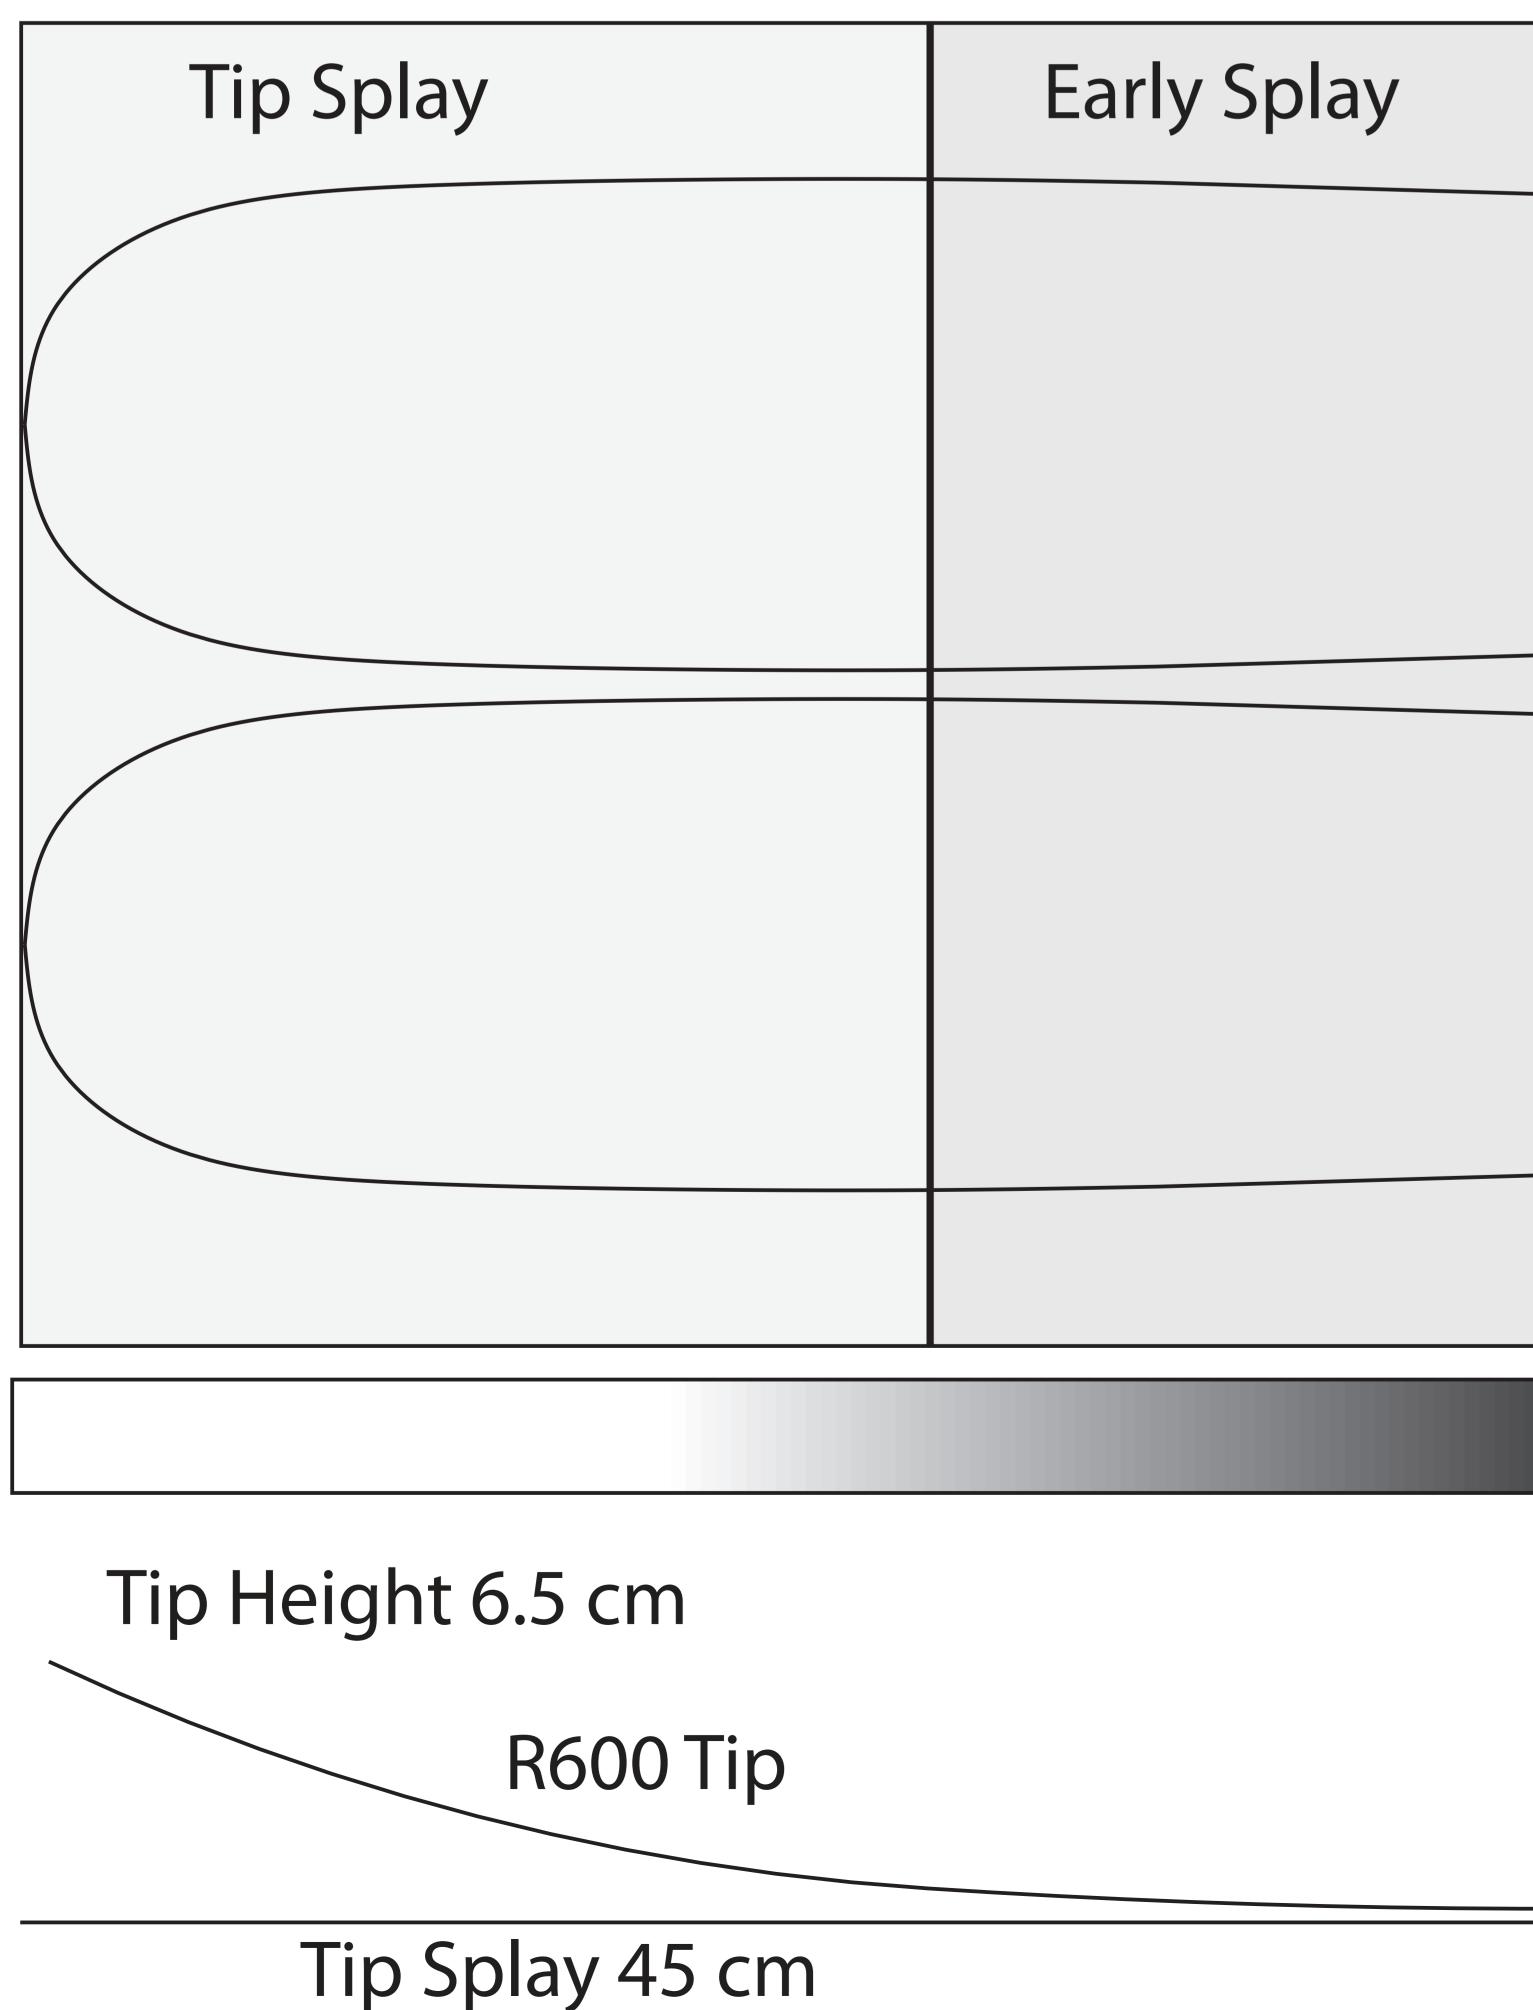


Camber Zone

### Backcountry Tip (MM) Mid (MM) Tail (MM) Base Length (CM) **Boot Center negative** Camber Height (mm Camber contact Leng Tip Height (CM) Tail Height (CM) Total Tip Splay (CM) Total Tail Splay (CM) Tip Taper (CM) Tail Taper (CM) Turn Radius (M) Side Cut length (CM) Weight (lbs)

## Flex Meter = 6.5

Camber 5mm x 115 cm

170	180	190
131	131	131
106	106	106
121	121	121
170	180	190
10	11	11
6	6	6
105	115	125
6.5	6.5	6.5
3	3	3
45	45	45
20	20	20
30	30	30
17	17	17
20	23	26
123	133	143
7.5	8	8.5
	131 106 121 170 10 10 6 105 6.5 6.5 3 3 45 20 30 17 20 123	1311311061061211211701801011661051156.56.53345452020303017172023123133

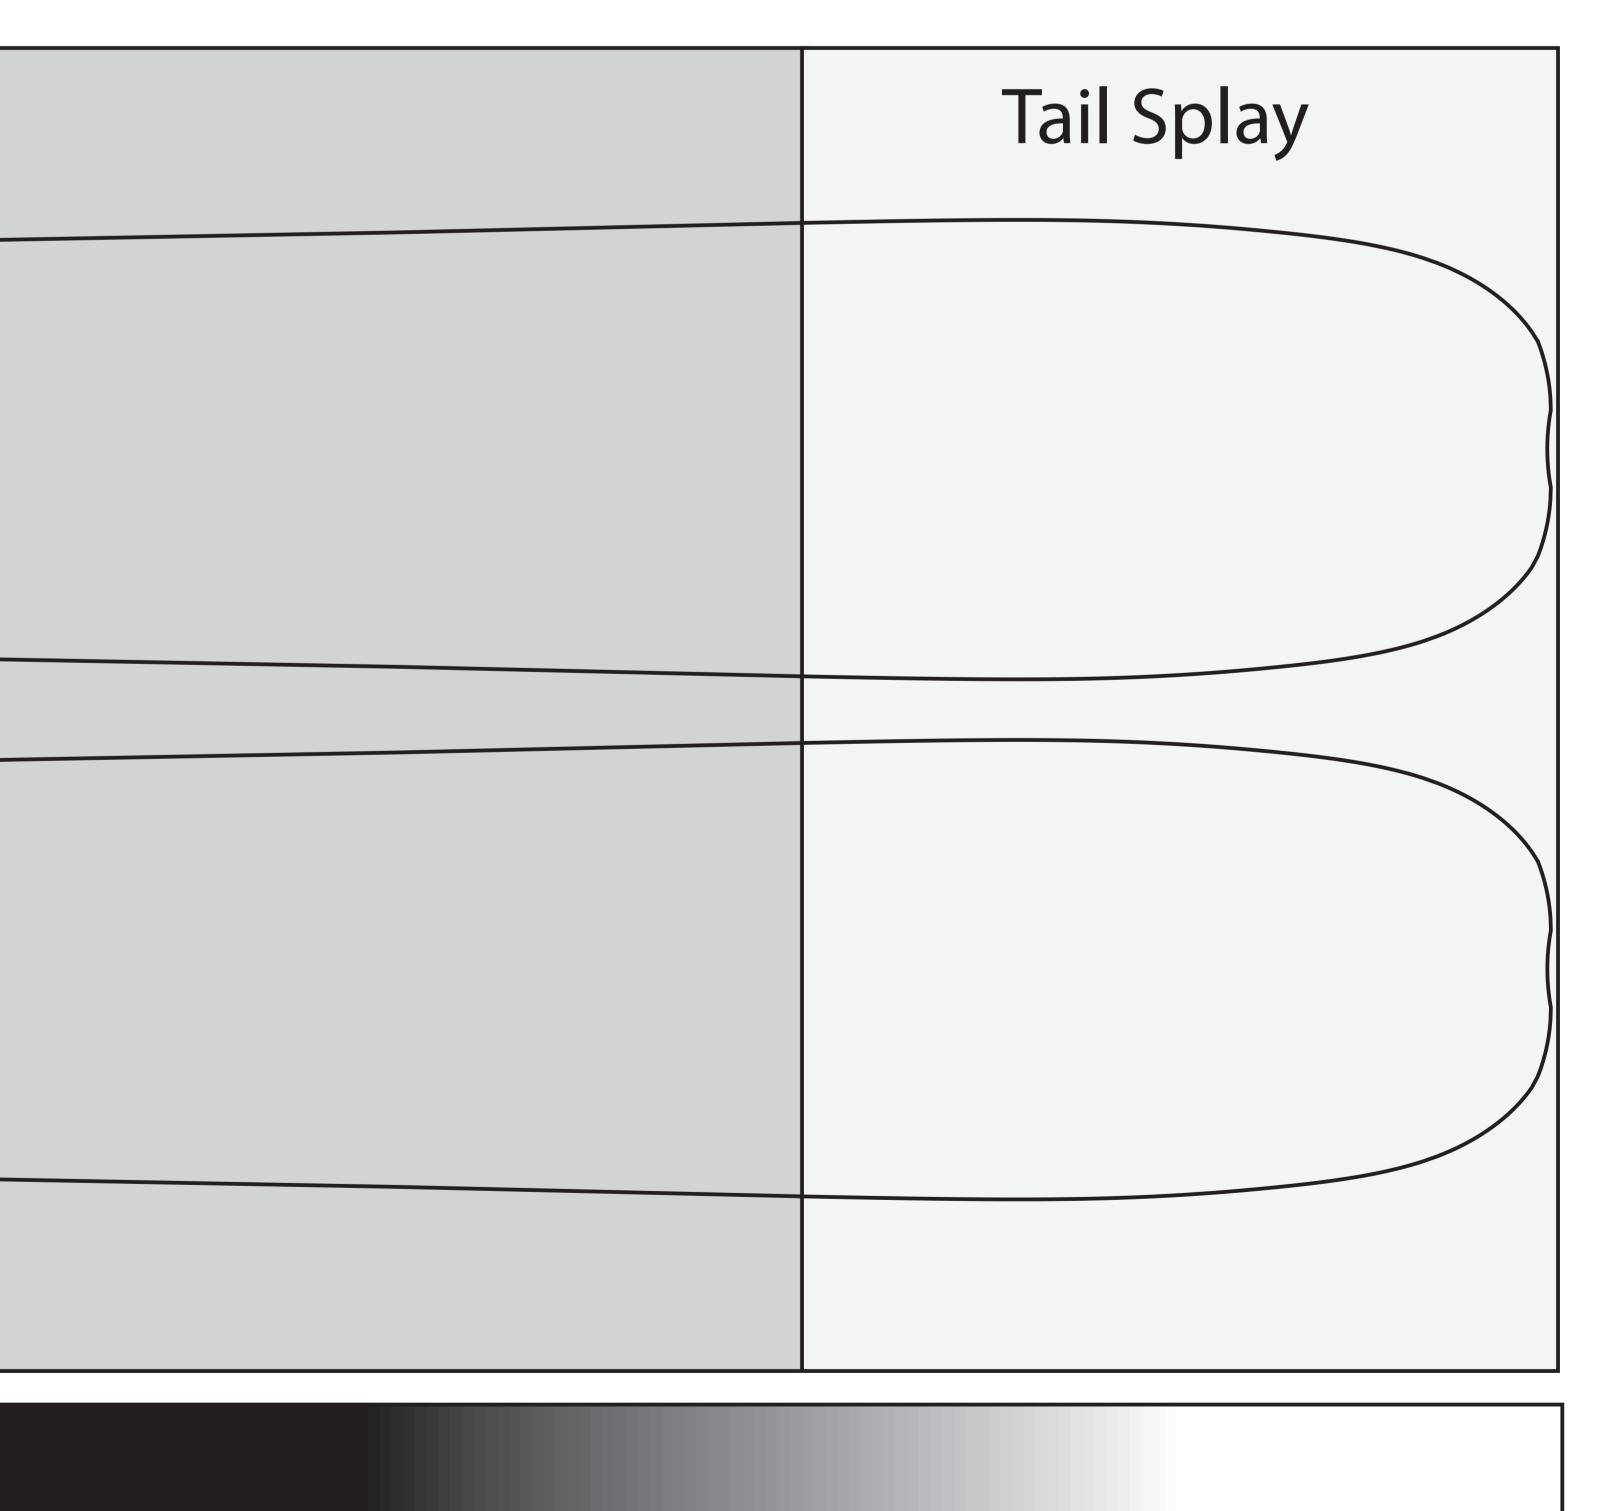

#### Tail Height 3 cm

R700 Tail

Tail Splay 20cm