Concept


Ingredients:

*NEW!!! Compound Camber

*Tri-Cut sidecut design = more powerful edging + slarve option *Durable and fast 4001 sintered running base *Ultra-high-molecular-weight polyethylene orbicular sidewalls....Extra resistant to abuse. *Strategically blended Basswood & Ash vertical laminate wood core; with "Book ended" precision. *Oversized 2.2mm edges with full wrap tip and tail; extra protection from impacts. *Rubberized epoxy; flexible and impact resistant with ultra high adhesion properties. *22 oz. triaxial fiberglass.

*Vibrant and durable fleece nylon top sheet. *VDS Rubber damping around the skis entire Perimeter. Reduces vibrations and improves bond strength. *Perforated VDS Rubber binding zone; reduces vibration and strengthens the binding mount zone.

*187 Version displayed.

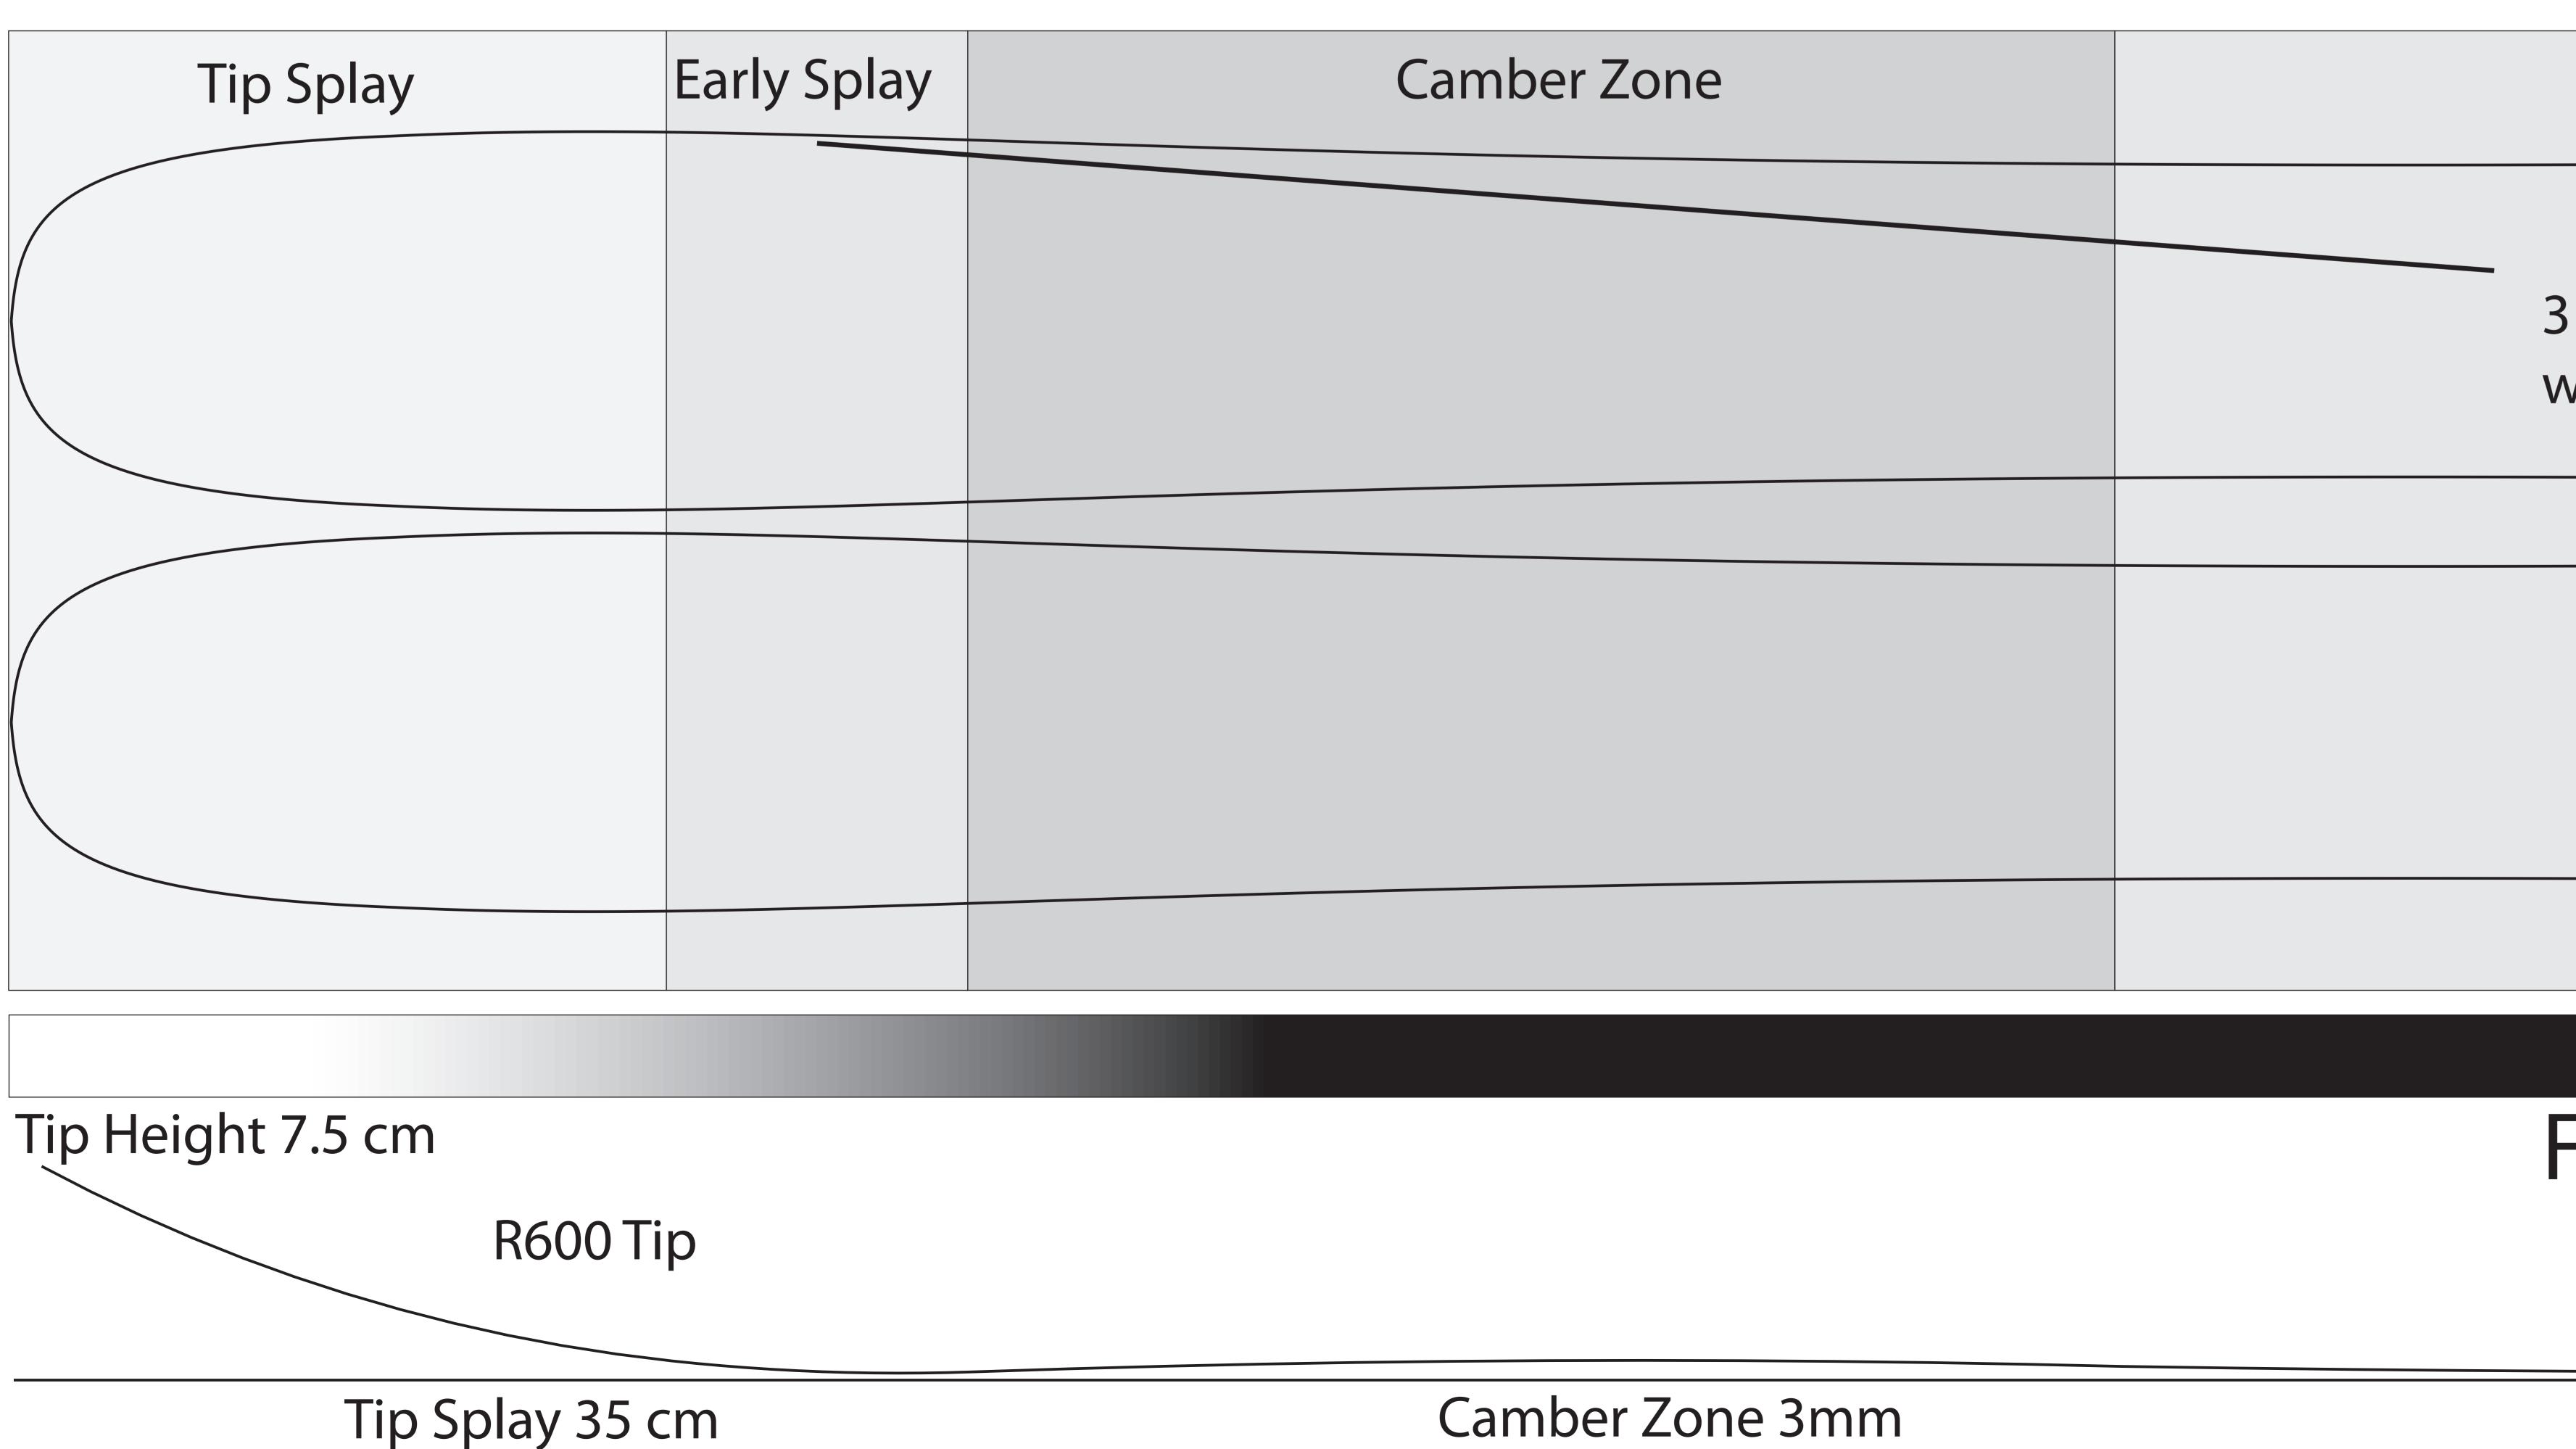

Concept	<u>177</u>	<u>187</u>
Tip (MM)	139	139
Mid (MM)	117	117
Tail (MM)	125	125
Base Length (CM)	177	187
Boot Center negative (CM)	8	8
Camber Height (mm)	4	4
Camber contact Length (CM)	117	127
Tip Height (CM)	7.5	7.5
Tail Height (CM)	4	4
Total Tip Splay (CM)	35	35
Total Tail Splay (CM)	25	25
Tip Taper (CM)	24	24
Tail Taper (CM)	20	20
Turn Radius (M) Avg	23	26
Side Cut length (CM)	133	143
Weight (lbs)	9.5	10

Camber Z Rocker Zone 3 Point Sidecut w/ Reverse underfoot

Flex Meter = 7

Rocker Zone



Zone	Early Sp	lay Ta	ail Splay	

Tail Height 4 cm

R700 Tail

Camber Zone 3mm

Tail Splay 25cm