
Buck's Powder Slarver

Ingredients:

*NEW!!! Compound Camber

*Tri-Cut sidecut design = more powerful edging + slarve option *Durable and fast 4001 sintered running base. *Ultra-high-molecular-weight polyethylene orbicular sidewalls....Extra resistant to abuse. *Strategically blended Basswood & Ash vertical laminate wood core; with "Book ended" pre *Oversized 2.2mm edges with full wrap tip and tail; extra protection from impacts. *Rubberized epoxy; flexible and impact resistant with ultra high adhesion properties. *22 oz. triaxial fiberglass.

*Vibrant and durable fleece nylon top sheet. *VDS Rubber damping around the skis entire Perimeter. Reduces vibrations and improves *Perforated VDS Rubber binding zone; reduces vibration and strengthens the binding mount

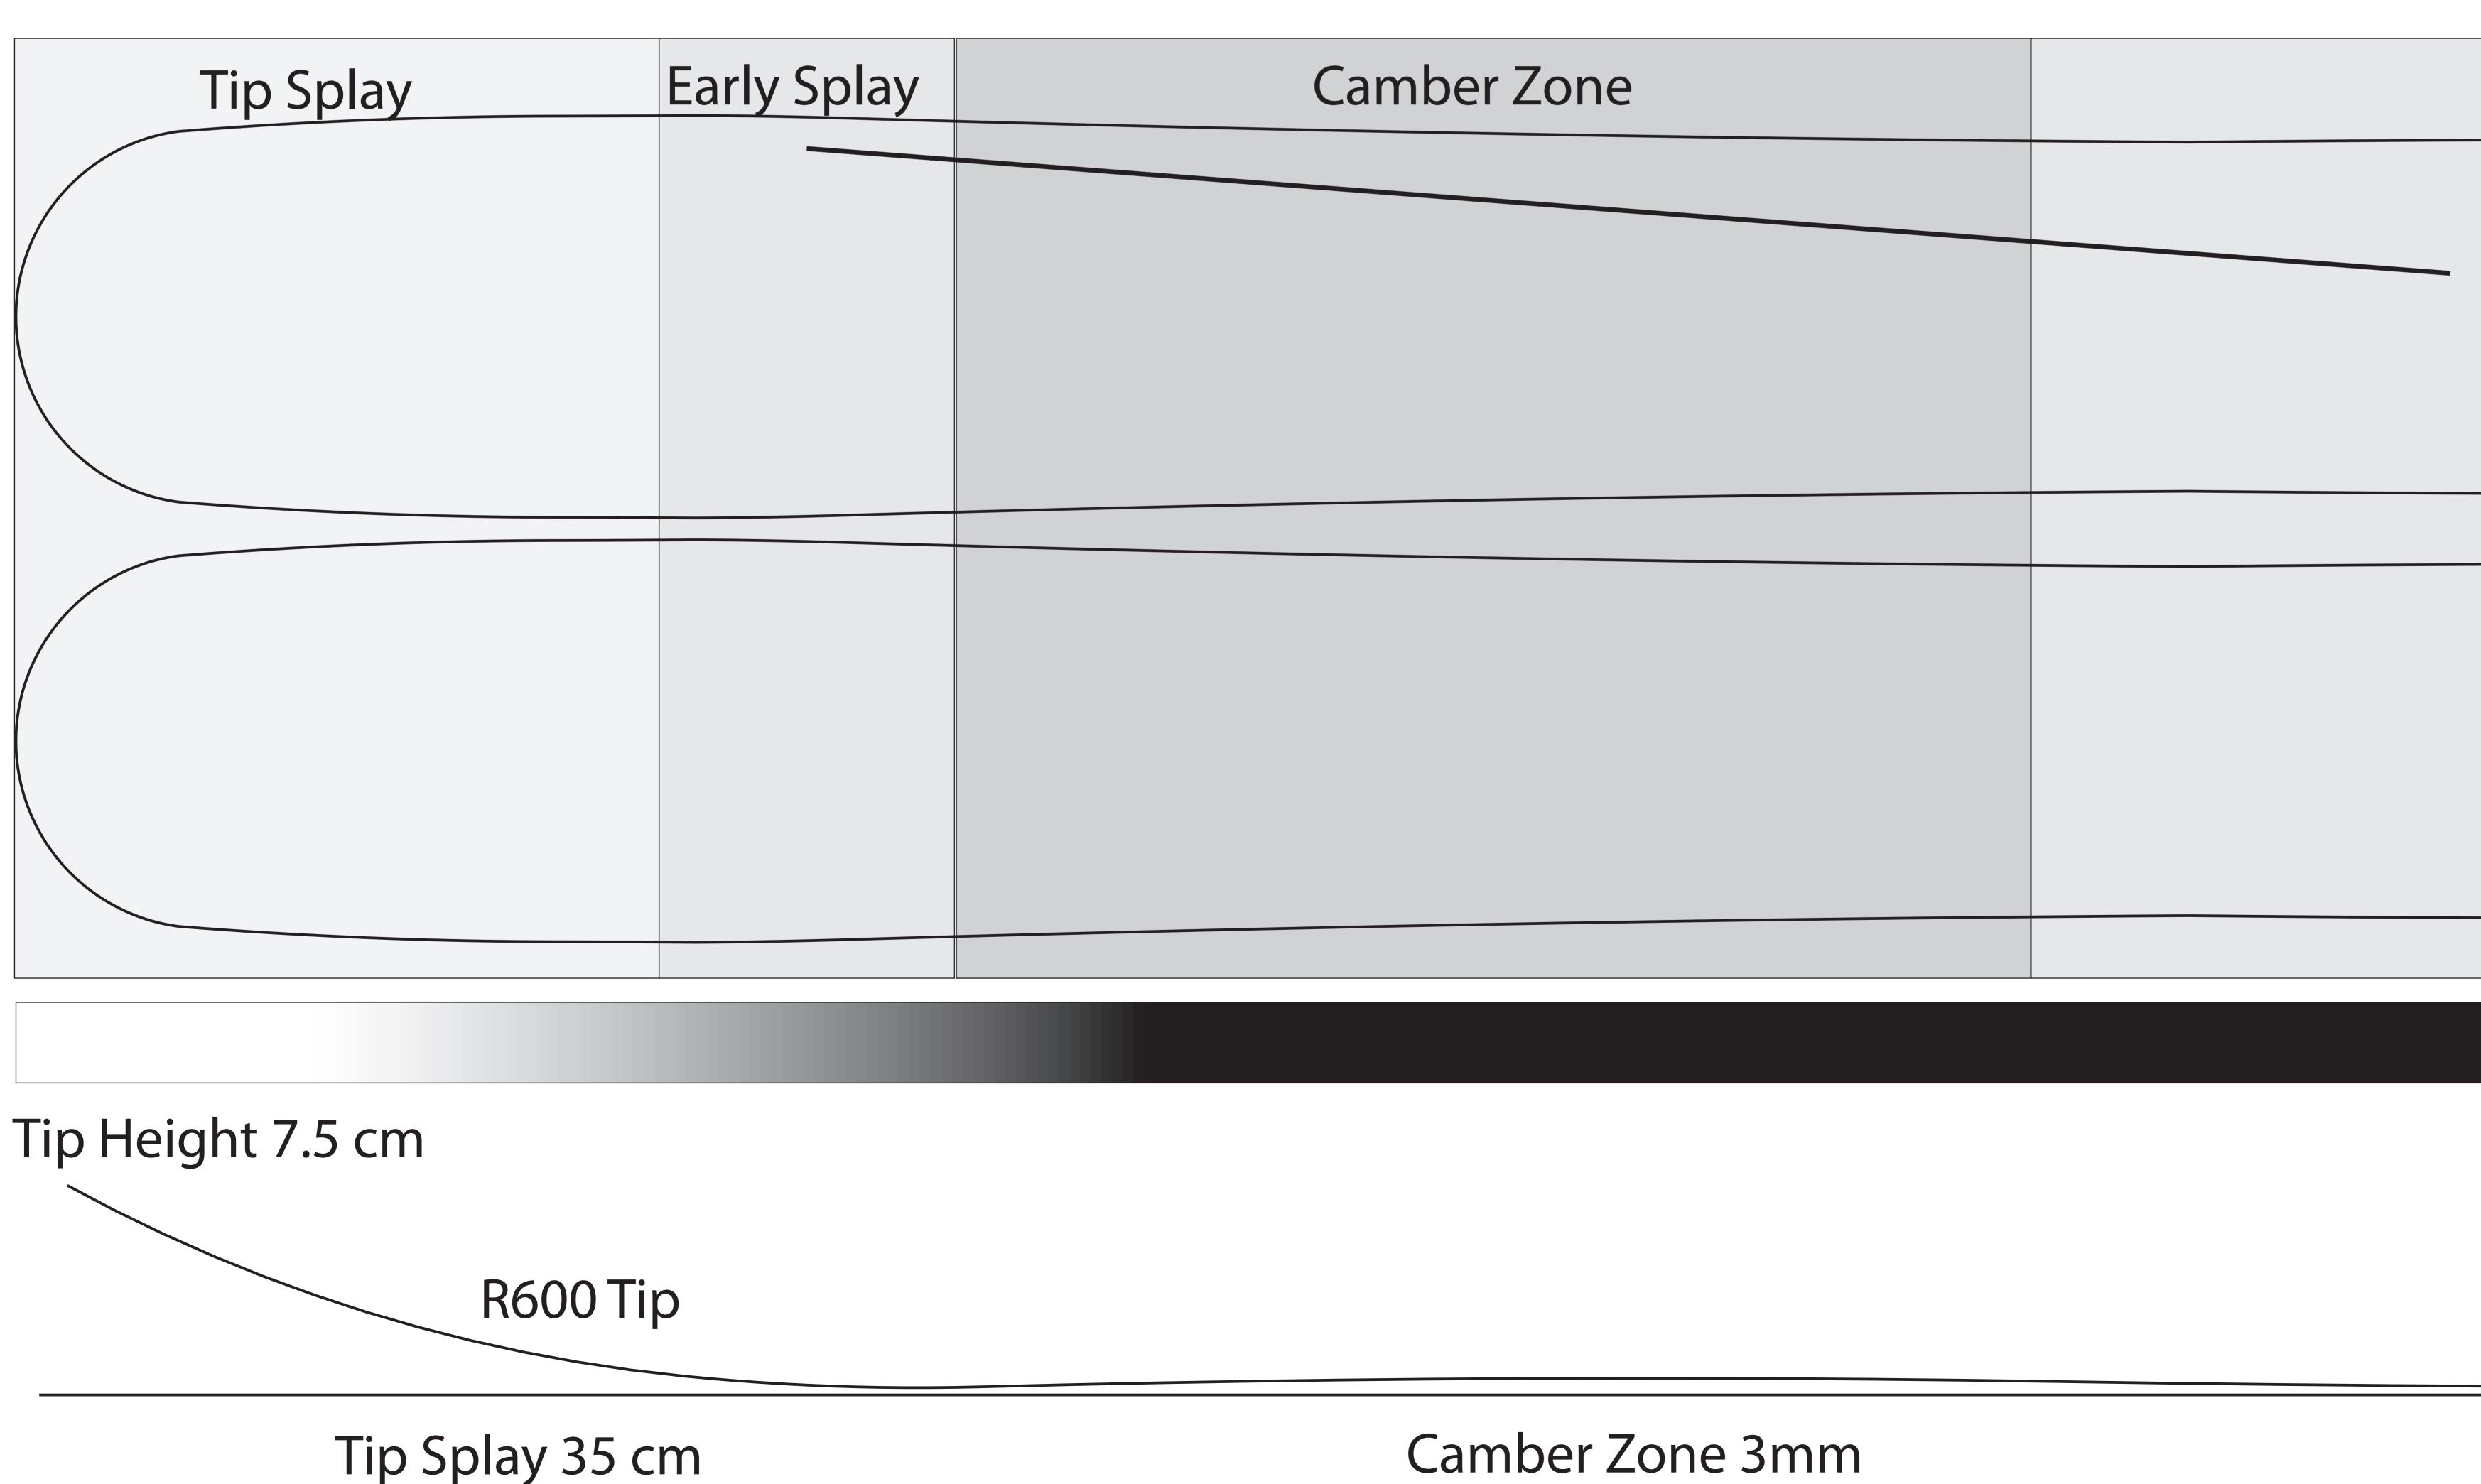


	BPS Technology	<u>183</u>	<u>193</u>
recision. Yes bond strength.	Tip (MM)	150	150
	Mid (MM)	132	132
	Tail (MM)	139	139
	Base Length (CM)	183	193
	Boot Center negative (CM)	10	10
	Camber Height (mm)	4	4
	Camber contact Length (CM)	123	133
	Tip Height (CM)	7.5	7.5
	Tail Height (CM)	4.5	4.5
	Total Tip Splay (CM)	35	35
	Total Tail Splay (CM)	25	25
	Tip Taper (CM)	30	30
	Tail Taper (CM)	20	20
	Turn Radius (M) Avg	33	36
	Side Cut length (CM)	133	143
	Weight (lbs)	10	10.5
Rocker Zone	Camber Zone	Tail Sp	olay
3 Point Sidecut			
w/ Reverse underfoot			

Flex Meter = 7

Rocker Zone

Camber Zone 3mm

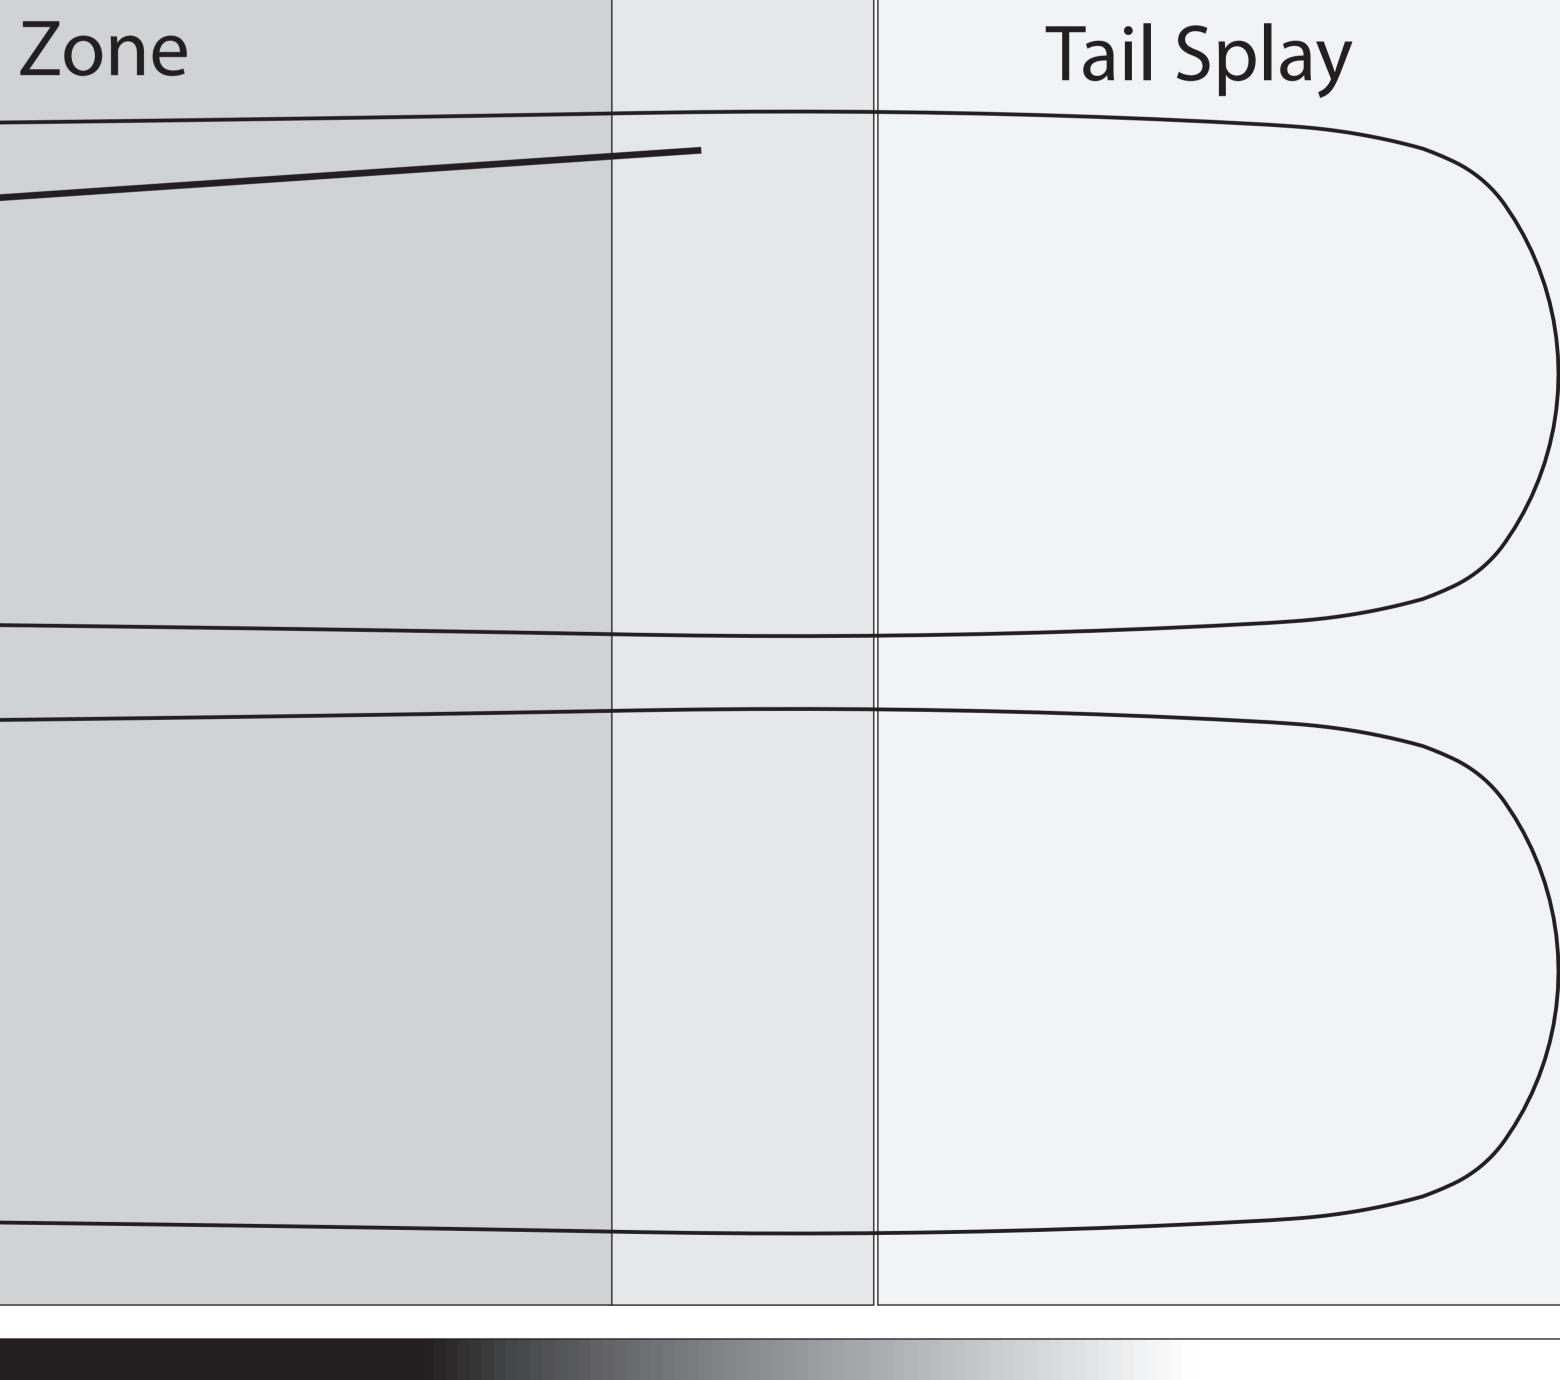

Tail Height 4.5 cm

R700 Tail

Tail Splay 25cm